



SUZHOU SEAPEAK CO.,LTD.



SUZHOU SEAPEAK CO., LTD.

Add: 313 Heji Guangchang 666 Ganjiang East Road Suzhou Jiangsu China
Tel : 0086 512 65309372 Fax.: 0086 512 65309371
Mobile: 13862141300 WhatsApp: 86 13862141300
QQ: 2885272979 Wechat: zxfhfgs
Website:www.irrigationhoses.com E-mail:sales@irrigationhoses.com

CONTENTS



01. PU Layflat Hose For Irrigator	21. • 1003 Female Coupling	33. • 9005 Ball Valve F/F
▼ PVC Layflat Hose	22. • 1004 Male Coupling	33. • 9006 Ball Valve M/F
02. • light PVC layflat hose	22. • 1008 End Plug	33. • 9007 Ball Valve M/M
03. • Heavy PVC Layflat Hose	23. • 2001 90 Degree Tee	
04. • Extra Heavy PVC Layflat Hose	23. • 2002 Reducing Tee	
05. PE Sprinkler Hose	23. • 2003 Female Tee	34. Centrifugal Filter
06. PE Woven Layflat Hose	24. • 2004 Male Tee	35. Media Filter
07. PE Layflat Hose	24. • 3001 Elbow	36. Filter
▼ Drip Line	25. • 3002 Female Elbow	41. Automatic Filtration System
08. • Cylindric Emitter Drip Tube	25. • 3003 Male Elbow	43. Fitting For Micro-irrigation
08. • Double Line Drip Tape	26. • 3004 Wall Plate Elbow Fitting	45. Mini Valve For Tubing
08. • Flat Emitter Drip Tape	Clamp Saddle	47. Lock Nut Fitting for Driptide
08. • Labyrinth Drip Tape	26. • 4001 Clamp Saddle	49. Fertilizer Injector
09. PVC Soft Hose	27. • 4002 Double Clamp Saddle	50. Air & Vacuum Valve
09. Soaker Hose	28. • 4005 Coupling Saddle	50. Arrow Dripper And Accessory
10. PE Pipe	28. • 4006 Double Coupling Saddle	51. Dripper
10. PVC Garden Hose	29. • 4007 Male Saddle	52. Microsprinkler
11. PVC Steel Wire Reinforced Hose	29. • 4008 Double Male Saddle	53. Fogger & Mister
12. PVC Air Hose	30. • 4010 Double Irrigation Saddle	54. Accessory For Microspray
13. Bauer Coupling	30. • 4011 Coupling Saddle Base	▼ Sprinkler
14. PVC Suction Hose	31. • 4013 Female Saddle Base	56. • 1.MS-160A
▼ Clamp	• 8001 Water Knockout Trap	56. • 2.MS-5020
18. • Gear Clamp	PP Union Ball Valve	57. • 3.MS-5025
19. • Heavy Duty Bolt Clamp	31. • 8004 PP Double Union Ball Valve	57. • 4.MS-5035D
20. • T-bolt Clamp	32. • 8006 Water Knockout Trap	58. • 5.MS-9703B
▼ Compresion Fitting	32. • 8007 Ball Valve M/F	58. • 6.MS-9814A
PP Compression Fitting PN16	32. • 9002 PP Single Female Union Ball Valve F	59. • 7.MS-9816
21. • 1001 Coupling	32. • 9003 PP Single Male Union Ball Valve M	59. • 8.MS-9949
21. • 1002 Reducing Coupling	33. • 9004 PP Double Union Brass Ball Valve	60. Sprinkler Hose Fitting

► PU Layflat Hose For Irrigator

PU layflat hose is made from abrasion-resistance PU and high strength polyester yarn. Strong bonding between cover and lining is due to the “extrusion through the jacket” manufacturing procedure. Our PU layflat hose is best choice for hard environment because of excellent abrasion-resistance. They are widely used to drag by irrigator.



- **Features:** Superior abrasion resistance
- **Sepecification data:**

Normal size (Inch)	ID(mm)	Working Pressure	Bursting pressure	Weight	
				lbs/ft	kg/m
1 1/2"	38	300psi/21bar	900psi/63bar	0.22	0.33
2"	51	300psi/21bar	900psi/63bar	0.28	0.41
2 1/2"	64	300psi/21bar	900psi/63bar	0.39	0.58
3"	76	250psi/17bar	750psi/51bar	0.50	0.75
3 1/2"	91	175psi/12bar	525psi/36bar	0.65	0.97
4"	103	175psi/12bar	525psi/36bar	0.76	1.14
4 1/4"	117	175psi/12bar	525psi/36bar	0.84	1.25
5"	127	175psi/12bar	525psi/36bar	0.95	1.42
6"	154	175psi/12bar	525psi/36bar	1.16	1.73

► Light PVC Layflat Hose

- **Construction:** 3-ply polyester yarns. Both tube and cover are extruded simultaneously to obtain maximum bonding.
- **Color:** blue, brown, red, orange, black, green, yellow and so on.
- **Standard length:** 20m, 25m,30m, 40m, 50m, 100m, 25ft, 50ft, 100ft, 300ft
- **Characteristic:** light weight,tough and economical, coils flat for easy storage,
- **Temp. range:** -5°F to 170°F
- **Applications:** mines, construction, irrigation, common water supply and delivery etc.
- **Caution:** for liability purposes, if temperature exceeds 110°F the working pressure will go down.
- **Storage:** keep in dry place, etc.
- **Shelf life of product:** 2 years



Normal size	PART #	W.P. (PSI)	B.P. (PSI)
1"	PVCLAY-25-L	45,60	135,180
1 1/4"	PVCLAY-32-L	45,60	135,180
1 1/2"	PVCLAY-38-L	45,60	135,180
2"	PVCLAY-51-L	45,60	135,180
2 1/2"	PVCLAY-64-L	45,60	135,180
2 3/4"	PVCLAY-70-L	45,60	135,180
3"	PVCLAY-76-L	45,60	135,180
3 1/2"	PVCLAY-90-L	45,60	135,180
4"	PVCLAY-102-L	45,60	135,180
5"	PVCLAY-127-L	45,60	135,180
6"	PVCLAY-152-L	45,60	135,180
8"	PVCLAY-203-L	45,60	135,180
10"	PVCLAY-254-L	40	120
12"	PVCLAY-305-L	30	90
14"	PVCLAY-356-L	30	90
16"	PVCLAY-406-L	30	90

► Heavy PVC Layflat Hose

- **Construction:** 3-ply polyester yarns. both tube and cover are extruded simultaneously to obtain maximum bonding.
- **Color:** blue, brown, red, orange, black, green, yellow and so on.
- **Standard length:** 20m, 25m,30m, 40m, 50m, 100m, 25ft, 50ft, 100ft, 300ft
- **Characteristic:** light weight,tough and economical, coils flat for easy storage,
- **Temp. range:** -5°F to 170°F
- **Applications:** mines, construction, irrigation, common water supply and delivery etc.
- **Caution:** for liability purposes, if temperature exceeds 110°F the working pressure will go down. please check with factory to ensure sufficient safety factor.



Normal size (Inch)	I.D.	PART #	W.P. (PSI)	B.P. (PSI)
1"	1.04"	PVCLAY-25-H	80,100	240,300
1 1/4"	1.3"	PVCLAY-32-H	80,100	240,300
1 1/2"	1.56"	PVCLAY-38-H	80,100	240,300
2"	2.09"	PVCLAY-51-H	80,100	240,300
2 1/2"	2.57"	PVCLAY-64-H	80,100	240,300
2 3/4"	2.76"	PVCLAY-70-H	80,100	240,300
3"	3.07"	PVCLAY-76-H	80,100	240,300
3 1/2"	3.54"	PVCLAY-90-H	80,100	240,300
4"	4.10"	PVCLAY-102-H	80,100	240,300
5"	5.07"	PVCLAY-127-H	80,100	240,300
6"	6.16"	PVCLAY-152-H	80,100	240,300
8"	8.17"	PVCLAY-203-H	80,100	240,300
10"	10.2"	PVCLAY-254-H	100	300

► Extra Heavy PVC Layflat Hose

- **Construction:** 3-ply polyester yarns. both tube and cover are extruded simultaneously to obtain maximum bonding.
- **Color:** blue, brown, red, orange, black, green, yellow and so on.
- **Standard length:** 20m, 25m,30m, 40m, 50m, 100m, 25ft, 50ft, 100ft, 300ft
- **Characteristic:** light weight,tough and economical, coils flat for easy storage,
- **Temp. range:** -5°F to 170°F
- **Applications:** mines, construction, irrigation, common water supply and delivery etc.
- **Caution:** for liability purposes, if temperature exceeds 110°F the working pressure will go down. please check with factory to ensure sufficient safety factor.



Normal size (Inch)	I.D.	PART #	W.P. (PSI)	B.P. (PSI)
1"	1.04"	PVCLAY-25-EH	120,150	360,450
1 1/4"	1.3"	PVCLAY-32-EH	120,150	360,450
1 1/2"	1.56"	PVCLAY-38-EH	120,150	360,450
2"	2.09"	PVCLAY-51-EH	120,150	360,450
2 1/2"	2.57"	PVCLAY-64-EH	120,150	360,450
3"	3.07"	PVCLAY-76-EH	120,150	360,450
4"	4.10"	PVCLAY-102-EH	120,150	360,450
5"	5.07"	PVCLAY-127-EH	120,150	360,450
6"	6.16"	PVCLAY-152-EH	120,150	360,450
8"	8.17"	PVCLAY-203-EH	120,150	360,450
10"	10.2"	PVCLAY-254-EH	120,150	360,450
12"	12.21"	PVCLAY-305-EH	120,150	360,450

▶
PE Sprinkler Hose

- Material:** 100% New LDPE Contains Anti-UV material
- Color:** Black/White/Grey/Green/Blue
- Hole Type:** 2/3/4/5/7/9 holes,could customized
- Use Life :** 3 Years



Specification									
Tube Diameter	Tube Width (FLAT)	Wall Thickness	Hole Size	Weight kg/roll	Working Pressure kg/cm2	Irrigation Range	Length	Packing	Quantities for 20' container
ø20 mm	30mm	0.2mm	0.4mm	2.4	0.8-1.0	3-5 m	200m/ roll	5rolls/carton (L.355*W.355*H.180MM)	1250 cartons
ø28 mm	43mm	0.2mm	0.6mm	2.9	0.8-1.0	3-5 m	200m/ roll	5rolls/carton (L.350*W.350*H.255MM)	900 cartons
ø32 mm	50mm	0.2mm	0.8mm	3.8	0.8-1.0	4.5-6 m	200m/ roll	5rolls/carton (L.370*W.370*H.295MM)	700 cartons
ø40 mm	65mm	0.3mm	0.9mm	3.9	0.8-1.0	4.5-6 m	100m/roll	5rolls/carton (L.350*W.350*H.350MM)	650 cartons
ø45 mm	68mm	0.3mm	0.9mm	4.0	0.8-1.0	5-8 m	100m/roll	5rolls/carton (L.350*W.350*H.370MM)	610 cartons
ø50 mm	80mm	0.375mm	0.9mm	5.5	0.8-1.0	5-8 m	100m/roll	5rolls/carton (L.380*W.380*H.430MM)	450 cartons

▶
PE Woven Layflat Hose

- Construction:**PE Woven Layflat Hose is constructed of jacket and lining. The jacket is made of high-strength synthetic fibre (quality polyester filament, polypropylene filament and PE filament) and the lining is made of polyethylene.
- Feature:** light weight, pressure resistance, frost resistance, aging resistance, against-erosion, against acid and alkali,no percolation, easy-usage.
- Application:** agriculture irrigation, mine industry, municipal water transportation and infra-structure construction etc.
- Specifications and main technical data:**



Size: 1"-16"
Length: 1-100M

Type	Specifications	W.P (Bar)	B.P (Bar)	Adhesive (N/25mm)
Standard	2"	4.5	13.7	≥20
	2.5"	3.7	11	≥20
	3"	3.2	9.8	≥20
	4"	2.3	7	≥20
	6"	1.3	3.8	≥20
Reinforced	2"	6.5	20	≥20
	2.5"	6	18	≥20
	3"	6	18	≥20
	3.5"	5	15	≥20
	4"	4	12	≥20
	5"	3	10	≥20
	6"	2.5	8	≥20
High-pressure	7"	2	6	≥20
	8"	1.5	5.5	≥20
	2"	11.7	35	≥20
	2.5"	10	32	≥20
	3"	9	29	≥20
	4"	8	25	≥20
	6"	6.7	20	≥20

► PE Layflat Hose

- **Structure:** Made of 100% New PE Contains Anti-UV material Flexible, economical and practicable with a single wall thickness 0.35-0.65mm.
- **Service Temperature:** -5°C~+50°C.
- **Standard Length:** 100 m



Description	Working Pressure	Packing		
Size	Bar	m/roll	kgs/roll	Meas. (H.XD.mm)
1"	2.0	100	3.5	40X350
1.25"	2.0	100	4.5	50X360
1.5"	2.0	100	6	60X380
2"	2.0	100	7	80X400
2.5"	2.0	100	10	100X420
3"	2.0	100	13	120X450
3.5"	1.8	100	16	140X450
4"	1.5	100	18.5	160X450
4.5"	1.5	100	22	160X450
5"	1.0	100	25	200X550
6"	1.0	100	30	240X550

► Drip Line

► Cylindric Emitter Drip Tube

Specification	
Diameter	12mm,16mm,20mm
Wall thickness	0.5-1.2mm
Spacing	10cm, 20cm, 25cm...200cm
Pressure	1bar
Flux	2L/H,2.5L/H, 3L/H, 4L/H
Roll Length	300-1000M



► Double Line Drip Tape

Specification	
Diameter	12mm,16mm
Wall thickness	0.127mm-0.6mm
Dripper spacing	100-500mm
Working Pressure	0.06-0.12Mpa
Flow Rate	from 0.85 L/H to 3 L/H
Roll length	1000-1500-2000-2500-3000m

- **Application:**
- **Greenhouse:** Cucumber, Strawberry, Tomato, Water Melon etc.
- **Land Cultivation:** Tobacco, Ginseng, Pepper, Water Melon etc.

► Flat Emitter Drip Tape

Specification	
Diameter	16mm,20mm
Wall thickness	0.15-0.5mm
Spacing	20-100mm
Pressure	0.8-1.2bar
Flux	0.85,1.2,1.5,1.8,-2.2,2.5.3L/H
Roll Length	500-2500M



► Labyrinth Drip Tape

Specification	
Diameter	12mm,16mm,20mm
Wall thickness	0.18mm, 0.2mm
Spacing	10cm, 20cm, 30cm
Pressure	1bar
Flux	2L/H
Roll Length	500-2500M



► PVC Soft Hose

PVC Soft hose		
ID(MM)	OD(MM)	M/ROLL
3	5	500
4	7	200
8	12	100



► Soaker Hose

• Description:

Infiltration can also be called underground drip irrigation, it is a tubular emitter. when the tube is full of water, the water will go through the pores inside the tube and arrive at the roots of plants through capillary of the soil.

• Application:

Green market, roof garden, vertical greening, fruit tree planting flower nursey, green houses, field crop, seasonal dry and drought -prone crop and aquaculture ponds.

• Advantage:

Save water, energy saving, save labor, improve soil, inhibit pests and diseases, protect root.

• Size:

Id(mm)	12.5-15.4
Od(mm)	17.1-20.4
Thickness(mm)	2.3-2.5
Weight(kgs)	1.4-2.7
Water seepage at wp1bar(l/min)	6-10



► PE Pipe

	MM	MM	BAR
PE Pipe	12	1	4
PE Pipe	16	1	4
PE Pipe	16	1.2	4
PE Pipe	16	1.4	5
PE Pipe	16	1.6	6
PE Pipe	20	1.2	2.5
PE Pipe	20	1.5	4
PE Pipe	20	1.6	4
PE Pipe	20	1.8	6
PE Pipe	25	1.9	6
PE Pipe	25	2	6
PE Pipe	32	2	4
PE Pipe	40	3	4
PE Pipe	50	3	4
PE Pipe	63	4	4



► PVC Garden Hose

- **Three layers:** PVC, polyester, PVC
- **Characteristics:** soft, elastic, bright and brilliant
- **Apply to:** garden irrigation, vehicle washing



PART #	INCH	I.D. (MM)	O.D. (MM)	WALL (MM)	LENGTH (M)	W.P. (BAR)	WEIGHT (KG/ROLL)	MEA (M3)
PVCGAR1014	3/8"	10	14	2	50	8	5.1	0.016
PVCGAR1216	1/2"	12	16	2	50	6	6	0.023
PVCGAR1217	1/2"	12	17	2.5	50	7	7.5	0.023
PVCGAR1620	5/8"	16	20	2	50	5	7	0.035
PVCGAR1621	5/8"	16	21	2.5	50	6	9	0.035
PVCGAR1923	3/4"	19	23	2	50	4	8.9	0.044
PVCGAR1924	3/4"	19	24	2.5	50	4	10.5	0.044
PVCGAR1925	3/4"	19	25	3	50	5	12.5	0.044
PVCGAR2529	1"	25	29	2	50	4	14.55	0.076
PVCGAR2530	1"	25	30	2.5	50	4	13.5	0.076
PVCGAR2531	1"	25	31	3	50	4	16	0.076

► PVC Steel Wire Reinforced Hose

The hose with steel wire inserted, fits to the temperature 10-60°C.

- **Characteristics:** elastic, rub-resistance, chemical resistance.
- **Apply to:** vacuum pumps in farming, watering, shipping, oil chemical industry, plastic processing machinery and sanitary equipments for food-stuff, etc.



PART #	INCH	I.D. (MM)	O.D. (MM)	WALL (MM)	W.P. (MPA)	B.P. (MPA)	LENGTH (M)	WEIGHT (KG/M)	MEA (M3)
PVCSTE-0611	1/4"	6	11	2.5	0.7	2.1	100	0.115	0.028
PVCSTE-0814	5/16"	8	14	3	0.7	2.1	100	0.156	0.033
PVCSTE-0915	3/8"	9	15	3	0.7	2.1	100	0.17	0.038
PVCSTE-1218	1/2"	12	18	3	0.6	1.8	100	0.22	0.051
PVCSTE-1522	5/8"	15	22	3.5	0.6	1.8	100	0.305	0.085
PVCSTE-1926	3/4"	19	26	3.5	0.6	1.8	50	0.38	0.063
PVCSTE-2533	1"	25	33	4	0.6	1.8	50	0.547	0.098
PVCSTE-3241	1-1/4"	32	41	4.5	0.6	1.8	40	0.85	0.109
PVCSTE-3848	1-1/2"	38	48	5	0.5	1.5	40	1.2	0.152
PVCSTE-5062	2"	50	62	6	0.5	1.5	40	1.6	0.24
PVCSTE-6480	2-1/2"	64	80	8.5	0.5	1.5	30	3	0.203
PVCSTE-7592	3"	75	92	8.5	0.4	1.2	30	3.9	0.291
PVCSTE-89107	3-1/2"	89	107	9	0.3	1.2	30	4.5	0.399
PVCSTE-102120	4"	102	120	9	0.4	0.8	30	5.2	0.569
PVCSTE-127141	5"	127	141	7	0.2	0.6	20	5	0.559
PVCSTE-152166	6"	152	166	7	0.2	0.6	20	6	1.24

► PVC Air Hose

- **Three layers:** PVC, polyester, PVC
- **Characteristics:** light-weight, wear resistance, erosion resistance, good flexibility
- **Apply to:** some pneumatic tools, pneumatic washing apparatus, compressors, engine components, machinery service tools, pesticide spraying apparatus and civil engineering pneumatic hammers



SIZE	PART #	I.D.	O.D.	LENGTH	MAX.W.P (BAR)	MAX. B.P (BAR)	WEIGHT
INCH		(MM)	MM	M/ROLL	AT 23°C		G/M
1/4"	PVCAIR-06512	6.5	12	100	20	80	100
1/4"	PVCAIR-065125	6.5	12.5	100	30	95	115
1/4"	PVCAIR-065135	6.5	13.5	100	40	160	142
5/16"	PVCAIR-08514	8.5	14	100	20	80	130
5/16"	PVCAIR-085145	8.5	14.5	100	30	90	140
5/16"	PVCAIR-085155	8.5	15.5	100	40	150	172
3/8"	PVCAIR-095165	9.5	16.5	100	40	120	185
3/8"	PVCAIR-1016	10	16	100	20	80	160
3/8"	PVCAIR-1017	10	17	50	40	120	190
1/2"	PVCAIR-1220	12	20	50	30	100	260
1/2"	PVCAIR-1320	13	20	50	20	75	240
5/8"	PVCAIR-1625	16	25	50	20	60	380
5/8"	PVCAIR-1626	16	26	50	30	85	428
3/4"	PVCAIR-19285	19	28.5	50	20	50	460
3/4"	PVCAIR-1929	19	29	50	25	75	490
1"	PVCAIR-25345	25	34.5	50	15	45	580
1"	PVCAIR-2535	25	35	50	25	60	610
1-1/4"	PVCAIR-3244	32	44	40	15	45	940
1-1/2"	PVCAIR-3850	38	50	40	15	40	1085
2"	PVCAIR-5064	50	64	40	15	30	1640

► **Bauer Coupling**



► **PVC Suction Hose**

PVC Suction Hose—corrugated Surface

Made of quality pvc reinforced with an integral helix of rigid PVC.

Corrugated outer surface provide high flexibility and small bending radius.

Smooth inner surface are excellent for conveying liquid, air, powders.

High abrasion resistant.



LIGHT DUTY

PART #	SIZE	I.D.	O.D.	LENGTH	MAX.W.P (BAR)	MAX. B.P (BAR)	WEIGHT
	INCH	(MM)	MM	M/ROLL	AT 23°C		G/M
PVCSUC01-1923	3/4"	19	23	30	6	18	230
PVCSUC01-2529	1"	25	29	30	6	18	290
PVCSUC01-3236	1-1/4"	32	36	30	6	18	350
PVCSUC01-3238	1-1/4"	32	38	30	6	18	400
PVCSUC01-3844	1-1/2"	38	44	30	6	18	550
PVCSUC01-3846	1-1/2"	38	46	30	6	18	650
PVCSUC01-5054	2"	50	54	30	5	15	550
PVCSUC01-5056	2"	50	56	30	5	15	700
PVCSUC01-6369	2-1/2"	63	69	30	4	12	880
PVCSUC01-6371	2-1/2"	63	71	30	4	12	1170
PVCSUC01-7581	3"	75	81	30	3	9	1160
PVCSUC01-7583	3"	75	83	30	3	9	1300
PVCSUC01-100108	4"	100	108	30	3	9	1950
PVCSUC01-100110	4"	100	110	30	3	9	2300
PVCSUC01-125135	5"	125	135	20	3	9	3000
PVCSUC01-125137	5"	125	137	20	3	9	3300
PVCSUC01-152164	6"	152	164	10	2	6	4500
PVCSUC01-152166	6"	152	166	10	2	6	5500
PVCSUC01-200214	8"	200	214	10	2	6	6300

HEAVY DUTY

PART #	SIZE	I.D.	O.D.	LENGTH	MAX.W.P (BAR)	MAX. B.P (BAR)	WEIGHT
	INCH	(MM)	MM	M/ROLL	AT 23°C		G/M
PVCSUC01-1925	3/4"	19	25	30	8	24	280
PVCSUC01-2531	1"	25	31	30	8	24	350
PVCSUC01-3240	1-1/4"	32	40	30	8	24	500
PVCSUC01-3848	1-1/2"	38	48	30	8	24	750
PVCSUC01-5058	2"	50	58	30	7	21	920
PVCSUC01-5060	2"	50	60	30	7	21	1050
PVCSUC01-6373	2-1/2"	63	73	30	6	18	1300
PVCSUC01-7585	3"	75	85	30	5	15	1650
PVCSUC01-7587	3"	75	87	30	5	15	1900
PVCSUC01-100112	4"	100	112	30	5	15	2900
PVCSUC01-100114	4"	100	114	30	5	15	3200
PVCSUC01-100116	4"	100	116	30	6	18	3700
PVCSUC01-125139	5"	125	139	20	4	12	3600
PVCSUC01-125141	5"	125	141	20	4	12	4000
PVCSUC01-152170	6"	152	170	10	4	12	7200
PVCSUC01-152174	6"	152	174	10	5	15	8000
PVCSUC01-200216	8"	200	216	10	3	9	6700

PVC Suction Hose—smooth surface

Smooth inner and outer surface.

Extensively used in industry and agriculture for pumping and transferring needs.

Suitable for conveying liquid, powder.

Excellent corrosion-proof protection for cable conduit and piping.

Excellent flexibility, light weight and small bending radius.

LIGHT DUTY

PART #	SIZE	I.D.	O.D.	LENGTH	MAX.W.P (BAR)	MAX. B.P (BAR)	WEIGHT
	INCH	(MM)	MM	M/ROLL	AT 23°C		G/M
PVCSUC01-1923	3/4"	19	23	30	6	18	230
PVCSUC01-2529	1"	25	29	30	6	18	290
PVCSUC01-3236	1-1/4"	32	36	30	6	18	350
PVCSUC01-3238	1-1/4"	32	38	30	6	18	400
PVCSUC01-3844	1-1/2"	38	44	30	6	18	550
PVCSUC01-3846	1-1/2"	38	46	30	6	18	650
PVCSUC01-5054	2"	50	54	30	5	15	550
PVCSUC01-5056	2"	50	56	30	5	15	700
PVCSUC01-6369	2-1/2"	63	69	30	4	12	880
PVCSUC01-6371	2-1/2"	63	71	30	4	12	1170
PVCSUC01-7581	3"	75	81	30	3	9	1160
PVCSUC01-7583	3"	75	83	30	3	9	1300
PVCSUC01-100108	4"	100	108	30	3	9	1950
PVCSUC01-100110	4"	100	110	30	3	9	2300
PVCSUC01-125135	5"	125	135	20	3	9	3000
PVCSUC01-125137	5"	125	137	20	3	9	3300
PVCSUC01-152164	6"	152	164	10	2	6	4500
PVCSUC01-152166	6"	152	166	10	2	6	5500
PVCSUC01-200214	8"	200	214	10	2	6	6300

HEAVY DUTY

PART #	SIZE	I.D.	O.D.	LENGTH	MAX.W.P (BAR)	MAX. B.P (BAR)	WEIGHT
	INCH	(MM)	MM	M/ROLL	AT 23°C		G/M
PVCSUC02-1925	3/4"	19	25	30	8	24	280
PVCSUC02-2531	1"	25	31	30	8	24	350

PVCSUC02-1925	3/4"	19	25	30	8	24	280
PVCSUC02-2531	1"	25	31	30	8	24	350
PVCSUC02-3240	1-1/4"	32	40	30	8	24	500
PVCSUC02-3848	1-1/2"	38	48	30	8	24	750
PVCSUC02-5058	2"	50	58	30	7	21	920
PVCSUC02-5060	2"	50	60	30	7	21	1050
PVCSUC02-6373	2-1/2"	63	73	30	6	18	1300
PVCSUC02-7585	3"	75	85	30	5	15	1650
PVCSUC02-7587	3"	75	87	30	5	15	1900
PVCSUC02-100112	4"	100	112	30	5	15	2900
PVCSUC02-100114	4"	100	114	30	5	15	3200
PVCSUC02-100116	4"	100	116	30	6	18	3700
PVCSUC02-125139	5"	125	139	20	4	12	3600
PVCSUC02-125141	5"	125	141	20	4	12	4000
PVCSUC02-152170	6"	152	170	10	4	12	7200
PVCSUC02-152174	6"	152	174	10	5	15	8000
PVCSUC02-200216	8"	200	216	10	3	9	6700

PVC Suction hose–fiber composite

Use high-strength fibers as reinforcement. Combine the features of suction hose& fiber hose.

Characteristic: Soft and flexible, Non-toxic.

Applications: used for conveying water, oil, powder, also can be used for conveying wine, juice etc.

PART #	SIZE	I.D.	O.D.	LENGTH	MAX.W.P (BAR)	MAX. B.P (BAR)	WEIGHT
	INCH	(MM)	MM	M/ROLL	AT 23°C		G/M
PPVCSUC03-5060	2"	50	60	30	8	24	1000
PVCSUC03-6374	2-1/2"	63	74	30	7	21	1400
PVCSUC03-7586	3"	75	86	30	6	18	1700
PVCSUC03-102111	4"	102	111	30	6	18	2500
PVCSUC03-125143	5"	125	143	20	5	15	4400
PVCSUC03-152168	6"	152	168	10	5	15	5800
PVCSUC03-200216	8"	200	216	10	4	12	8500

▶ Clamp

▶ Gear Clamp



INCH	MIN SIZE	MAX SIZE	PART #
3/8"	0.38"	0.88"	CLAMP-G-06
1/2"	0.44"	1"	CLAMP-G-08
5/8"	0.56"	1.06"	CLAMP-G-10
3/4"	0.56"	1.25"	CLAMP-G-12
1"	0.69"	1.5"	CLAMP-G-16
1 1/4"	0.75"	1.75"	CLAMP-G-20
1 1/2"	1.06"	2'	CLAMP-G-24
1 3/4"	1.31"	2.25"	CLAMP-G-28
2"	1.56"	2.5"	CLAMP-G-32
2 1/4"	1.81"	2.75"	CLAMP-G-36
2 1/2"	2.06"	3"	CLAMP-G-40
2 3/4"	2.31"	3.25"	CLAMP-G-44
3"	2.56"	3.5"	CLAMP-G-48
3 1/4"	2.81"	3.75"	CLAMP-G-52
3 1/2"	3.06"	4"	CLAMP-G-56
3 3/4"	3.31"	4.25"	CLAMP-G-60
4"	2.5"	4.5"	CLAMP-G-64
4 1/2"	3"	5"	CLAMP-G-72

5"	3.5"	5.5"	CLAMP-G-80
5 1/4"	3.75"	5.75"	CLAMP-G-84
5 1/2"	4"	6"	CLAMP-G-88
6"	4.5"	6.5"	CLAMP-G-96
6 1/2"	5"	7"	CLAMP-G-104
7"	5.75"	7.75"	CLAMP-G-116
8"	6.5"	8.5"	CLAMP-G-128
9 1/2"	2"	10"	CLAMP-G-152
11 3/4"	10.25"	12.25"	CLAMP-G-188
12 1/2"	11"	13'	CLAMP-G-200
13 1/4"	11.75"	13.75"	CLAMP-G-212
14"	12.5"	14.5"	CLAMP-G-224
24 3/8"	22.88"	24.88"	CLAMP-G-390
5 1/4"	3.75"	5.75"	CLAMP-G-84
5 1/2"	4"	6"	CLAMP-G-88
6"	4.5"	6.5"	CLAMP-G-96
6 1/2"	5"	7"	CLAMP-G-104
7"	5.75"	7.75"	CLAMP-G-116
8"	6.5"	8.5"	CLAMP-G-128
9 1/2"	2"	10"	CLAMP-G-152
11 3/4"	10.25"	12.25"	CLAMP-G-188
12 1/2"	11"	13'	CLAMP-G-200
13 1/4"	11.75"	13.75"	CLAMP-G-212
14"	12.5"	14.5"	CLAMP-G-224
24 3/8"	22.88"	24.88"	CLAMP-G-390

► Heavy Duty Bolt Clamp



RANGE	RANGE	BAND WIDTH	PART #
317-19mm	0.67-0.75"	0.708"	CLAMP-HD-1719
19-21mm	0.75-0.83"	0.708"	CLAMP-HD-1921
21-23mm	0.83-0.91"	0.708"	CLAMP-HD-2123
23-25mm	0.91-0.98"	0.708"	CLAMP-HD-2325
25-27mm	0.98-1.06"	0.708"	CLAMP-HD-2527
27-29mm	1.06-1.14"	0.708"	CLAMP-HD-2729
29-31mm	1.14-1.22"	0.787"	CLAMP-HD-2931
31-34mm	1.22-1.34"	0.787"	CLAMP-HD-3134
34-37mm	1.34-1.46"	0.787"	CLAMP-HD-3437
37-40mm	1.46-1.57"	0.787"	CLAMP-HD-3740
40-43mm	1.57-1.69"	0.787"	CLAMP-HD-4043
43-47mm	1.69-1.85"	0.787"	CLAMP-HD-4347
47-51mm	1.85-2.01"	0.787"	CLAMP-HD-4751
51-55mm	2.01-2.17"	0.787"	CLAMP-HD-5155

55-59mm	2.17-2.32"	0.787"	CLAMP-HD-5559
59-63mm	2.32-2.48"	0.787"	CLAMP-HD-5963
63-68mm	2.48-2.68"	0.787"	CLAMP-HD-6368
68-73mm	2.68-2.87"	0.984"	CLAMP-HD-6873
73-79mm	2.87-3.11"	0.984"	CLAMP-HD-7379
79-85mm	3.11-3.35"	0.984"	CLAMP-HD-7985
85-91mm	3.35-3.58"	0.984"	CLAMP-HD-8591
91-97mm	3.58-3.82"	0.984"	CLAMP-HD-9197
97-104mm	3.82-4.09"	0.984"	CLAMP-HD-97104
104-112mm	4.09-4.41"	0.984"	CLAMP-HD-104112
112-121mm	4.41-4.76"	0.984"	CLAMP-HD-112121
121-130mm	4.76-5.12"	0.984"	CLAMP-HD-121130
130-140mm	5.16-5.51"	1.024"	CLAMP-HD-130140
140-150mm	5.51-5.91"	1.024"	CLAMP-HD-140150
150-162mm	5.91-6.38"	1.024"	CLAMP-HD-150162
162-174mm	6.38-6.85"	1.024"	CLAMP-HD-162174
174-187mm	6.85-7.36"	1.024"	CLAMP-HD-174187
187-200mm	7.36-7.87"	1.024"	CLAMP-HD-187200
200-213mm	7.87-8.39"	1.024"	CLAMP-HD-200213
213-226mm	8.39-8.9"	1.024"	CLAMP-HD-213226
226-239mm	8.9-9.41"	1.024"	CLAMP-HD-226239
240-252mm	9.45-9.92"	1.024"	CLAMP-HD-240252

► T-bolt Clamp



PART #	MIN SIZE	MAX SIZE
CLAMP-T-022	1.38"	1.52"
CLAMP-T-024	1.5"	1.64"
CLAMP-T-026	1.63"	1.88"
CLAMP-T-028	1.75"	2"
CLAMP-T-030	1.88"	2.13"
CLAMP-T-032	2"	2.25"
CLAMP-T-034	2.13"	2.38"
CLAMP-T-036	2.25"	2.56"
CLAMP-T-038	2.38"	2.69"
CLAMP-T-040	2.5"	2.81"
CLAMP-T-042	2.63"	2.94"
CLAMP-T-044	2.75"	3.06"
CLAMP-T-046	2.88"	3.19"
CLAMP-T-049	3.06"	3.38"
CLAMP-T-052	3.25"	3.56"
CLAMP-T-054	3.38"	3.69"

CLAMP-T-057	3.56"	3.88"
CLAMP-T-061	3.81"	4.13"
CLAMP-T-065	4.06"	4.38"
CLAMP-T-069	4.31"	4.63"
CLAMP-T-073	4.56"	4.88"
CLAMP-T-077	4.81"	5.13"
CLAMP-T-081	5.06"	5.38"
CLAMP-T-085	5.31"	5.63"
CLAMP-T-089	5.56"	5.88"
CLAMP-T-096	6"	6.31"
CLAMP-T-100	6.25"	6.56"
CLAMP-T-104	6.5"	6.81"
CLAMP-T-108	6.75"	7.06"
CLAMP-T-116	7.25"	7.56"
CLAMP-T-124	7.75"	8.06"
CLAMP-T-132	8.25"	8.56"
CLAMP-T-135	8.44"	8.75"
CLAMP-T-148	9.25"	9.56"
CLAMP-T-164	10.25"	10.56"

► **Compresion Fitting**

► **PP Compression Fitting PN16**

1001 Coupling



Size	PCS/CARTONS
20	240
25	170
32	112
40	60
50	32
63	18
75	16
90	8
110	5

1002 Reducing Coupling



Size	PCS/CARTONS
20*25	180
32*20	120
32*25	112
40*25	65
40*32	64
50*20	48
50*25	48

50*32	48
50*40	36
63*25	30
63*32	30
63*40	25
63*50	24
75*50	18
75*63	18
90*32	12
90*50	10
90*63	10
90*75	10
110*32	8
110*50	8
110*63	8
110*75	6
110*90	6

1003 Female Coupling



Size	PCS/CTN
20*1/2	420
20*3/4	400
20*1	360
25*1/2	240
25*3/4	240
25*1	220
32*1/2	160
32*3/4	160
32*1	160

32*11/4	160
40*1	96
40*11/4	90
40*11/2	90
50*11/4	60
50*11/2"	60
50*2	52
63*11/4	30
63*11/2	28
63*2	28
75*2	27
75*2 1/2	24
75*3	24
90*2 1/2	13
90*3	13
90*4"	13
110*3	8
110*4	8

1004 Male Coupling



Size	PCS/CTN
20*1/2	420
20*3/4	420
20*1	390
25*1/2	240
25*3/4	240
25*1	240
32*1/2	180
32*3/4	160
32*1	160

32*11/4	140
40*1	90
40*11/4	90
40*1 1/2	90
50*11/4	60
50*11/2	60
50*2	52
63*11/4	32
63*11/2	32
63*2	32
63*21/2	28
75*2	27
75*21/2	27
75*3	24
90*21/2	14
90*3	14
90*4	14
110*3	8
110*4	8

1008 End Plug



Size	PCS/CTN
20	240
25	170
32	112
40	60
50	32
63	18
75	16
90	8
110	5

2001 90 Degree Tee



Size	PCS/CTN
20	140
25	90
25	90
32	52
40	32
50	18
63	9
75	6
90	4
110	2

2002 Reducing Tee



Size	PCS/CTN
25*20*25	96
32*20*32	70
32*25*32	60
40*25*40	40
40*32*40	36
50*25*50	25
50*32*50	25
50*40*50	20

63*25*63	12
63*32*63	12
63*40*63	12
63*50*63	10
75*50*75	9
75*63*75	9
90*63*90	4
90*75*90	4
110*63*110	3
110*75*110	3
110*90*110	3

2003 Female Tee



Size	PCS/CTN
20*1/2*20	195
20*3/4*20	180
25*1/2*25	120
25*3/4*25	120
25*1*25	112
32*1/2*32	80
32*3/4*32	80
32*1*32	80
40*1*40	48
40*11/4*40	48
50*11/4*50	26
50*11/2*50	26
63*11/2*63	13

63*2*63	13
75*2	9
75*21/2	9
75*3	9
90*21/2	6
90*3	6
90*4	6
110*3	4
110*4	4

2004 Male Tee



Size	PCS/CTN
20*1/2*20	195
20*3/4*20	180
20*1"*20	180
25*1/2*25	120
25*3/4*25	120
25*1*25	104
32*1/2*32	85
32*3/4*32	85
32*1*32	85
32*11/4*32	80
40*1*40	40
40*11/4*40	40
40*11/2*40	40
50*1"*50	26
50*11/4*50	26

50*11/2*50	26
50*2*50	26
63*11/4	14
63*11/2*63	14
63*2*63	14
75*2	9
75*21/2	9
75*3	9
90*21/2	5
90*3	5
90*4	5
110*3	4
110*4	4

3001 Elbow



Size	PCS/CTN
20	240
25	140
32	96
40	51
50	30
63	16
75	10
90	6
110	3

3002 Female Elbow



Size	PCS/CTN
20*1/2	360
20*3/4	330
25*1/2	240
25*3/4	210
25*1	180
32*1/2	140
32*3/4	140
32*1	120
40*3/4	70
40*1	70
40*1 1/4	70
50*1 1/4	39
50*1 1/2	39
63*1 1/2	22
63*2	22
63*2 1/2	16
75*2	15
75*2 1/2	15
75*3	15
90*2 1/2	10
90*3	10
90*4	10
110*3	6
110*4	6

3003 Male Elbow



Size	PCS/CTN
20*1/2	360
20*3/4	360
20*1	220
25*1/2	240
25*3/4	240
25*1	180
32*1/2	130
32*3/4	130
32*1	130
32*1 1/4	120
40*1	80
40*1 1/4	80
40*1 1/2	80
50*1 1/4	52
50*1 1/2	52
63*1 1/4	24
63*1 1/2	24
63*2	24
75*2"	15
75*2 1/2	15
75*3	15
90*3	10
90*4	10
110*2 1/2	10
110*3	6
110*4	6

3004 Wall Plate Elbow Fitting



Size	PCS/CTN
20*1/2	260
25*3/4	130

► Clamp Saddle

4001 Clamp Saddle



Size	PCS/CTN
20*1/2	400
25*1/2	320
25*3/4	320
32*1/2	300
32*3/4	300
32*1	240
40*1/2	180
40*3/4	180
40*1	180
50*1/2	130
50*3/4	130
50*1	120
50*1 1/4	120

63*1/2	110
63*3/4	110
63*1	110
63*1 1/4	80
63*1 1/2	80
75*1/2	80
75*3/4	80
75*1	80
75*1 1/4	54
75*1 1/2	54
75*2	54
90*1/2	70
90*3/4	70
90*1	70
90*1 1/4	45
90*1 1/2	45
90*2	45
110*1/2	54
110*3/4	54
110*1	54
110*1 1/4	36
110*1 1/2	36
110*2	36
125*1/2	36
125*3/4	36
125*1	36
125*1 1/4	36
125*1 1/2	36
125*2	36
140*1/2	30
140*3/4	30
140*1	30
140*1 1/4	30
140*1 1/2	30
140*2	30
160*1/2	25
160*3/4	25
160*1	25

160*11/2	25
160*11/4	25
160*2	25
160*21/2	15
160*3	15
160*4	13

4002 Double Clamp Saddle



Size	PCS/CTN
	360
25*1/2	300
25*3/4	300
32*1/2	280
32*3/4	280
32*1	220
40*1/2	160
40*3/4	160
40*1	160
50*1/2	120
50*3/4	120
50*1	120
50*11/4	100
63*1/2	100
63*3/4	100
63*1	100
63*11/4	70
63*11/2	70
75*1/2	70
75*3/4	70
75*1	70

75*11/4	39
75*11/2	39
75*2	39
90*1/2	60
90*3/4	60
90*1	60
90*11/4	36
90*11/2	36
90*2	36
110*1/2	45
110*3/4	45
110*1	45
110*11/4	30
110*11/2	30
110*2	30
125*1/2	30
125*3/4	30
125*1	30
125*11/4	30
125*11/2	30
125*2	30
140*1/2	27
140*3/4	27
140*1	27
140*11/4	27
140*11/2	27
140*2	27
160*1/2	20
160*3/4	20
160*1	20
160*11/2	20
160*11/4	20
160*2	20
160*21/2	15
160*3	15
160*4	15

4005 Coupling Saddle



Size	PCS/CTN
32*20	90
32*25	90
40*20	80
40*25	70
40*32	60
50*20	100
50*25	90
50*32	80
50*40	70
63*20	80
63*25	70
63*32	70
63*40	70
63*50	50
75*20	70
75*25	70
75*32	64
75*40	50
75*50	36
90*20	52
90*25	52
90*32	48
90*40	44
90*50	32
110*20	40
110*25	40
110*32	36
110*40	32
110*50	24

4006 Double Coupling Saddle



Size	PCS/CTN
32*20	60
32*25	60
40*20	50
40*25	50
40*32	40
50*20	80
50*25	80
50*32	70
50*40	60
63*20	80
63*25	70
63*32	60
63*40	60
63*50	40
75*20	50
75*25	50
75*32	36
75*40	36
75*50	24
90*20	36
90*25	36
90*32	32
90*40	28
90*50	22
110*20	32
110*25	32
110*32	24
110*40	20
110*50	16

4007 Male Saddle



Size	PCS/CTN
32*1/2	120
32*3/4	120
32*1	120
40*1/2	96
40*3/4	96
40*1	96
50*1/2	60
50*3/4	60
50*1	60
50*11/4	50
63*1/2	100
63*3/4	100
63*1	90
63*11/2	68
63*11/4	68
75*1/2	80
75*3/4	80
75*1	80
75*11/2	80
75*11/4	80
90*1/2	64
90*3/4	64
90*1	64
90*11/2	64
90*11/4	64
110*1/2	48

110*3/4	48
110*1	48
110*11/2	48
110*11/4	48

4008 Double Male Saddle



Size	PCS/CTN
32*1/2	120
32*3/4	120
32*1	120
40*1/2	90
40*3/4	90
40*1	90
50*1/2	50
50*3/4	50
50*1	50
50*11/4	40
63*1/2	90
63*3/4	90
63*1	90
63*11/2	64
63*11/4	64
75*1/2	70
75*3/4	70
75*1	70
75*11/2	70
75*11/4	70

90*1/2	64
90*3/4	64
90*1	64
90*11/2	48
90*11/4	48
110*1/2	48
110*3/4	48
110*1	48
110*11/2	48
110*11/4	48

4010 Double Irrigation Saddle



Size	PCS/CTN
32*16	120
32*20	120
40*16	80
40*20	80
40*25	80
50*16	120
50*20	120
50*25	120
63*16	100
63*20	100
63*25	100

4011 Coupling Saddle Base



Size	PCS/CTN
50*20	40
50*25	40
50*32	40
50*40	40
63*20	35
63*25	35
63*32	35
63*40	35
63*50	35
75*20	32
75*25	32
75*32	28
75*40	27
75*50	20
90*20	24
90*25	24
90*32	20
90*40	20
90*50	19
110*20	16
110*25	16
110*32	16
110*40	16
110*50	16

4013 Male Saddle Base



Size	PCS/CTN
50*1/2	45
50*3/4	45
50*1	45
50*11/4	45
63*1/2	40
63*3/4	40
63*1	40
63*11/4	40
63*11/2	40
75*1/2	25
75*3/4	25
75*1	25
75*11/4	25
75*11/2	25
90*1/2	25
90*3/4	25
90*1	25
90*11/4	25
90*11/2	25
110*1/2	18
110*3/4	18
110*1	18
110*11/4	18
110*11/2	18

8001 Water Knockout Tra



Size	PCS/CTN
20*11/4"	120
25*11/4"	100
32*11/4"	80

► PP Union Ball Valve

8004 Ball Valve M/F



Size	PCS/CTN
20*20	160
25*25	90
32*32	70
40*40	48
50*50	28
63*63	15

8006 Water Knockout Trap



Size	PCS/CTN
110*32/25	16
160*32/25	8

8007 Ball Valve M/F



Size	PCS/CTN
1/2"	256
3/4"	126
1"	120
1-1/4"	60
1-1/2"	40
2"	24
2-1/2"	16
3"	6
4"	4

9002 PP Single Female Union Ball Valve F



Size	PCS/CTN
20*1/2"	200
25*3/4"	120
32*1"	80
40*11/4"	60
50*11/2	36
63*2	19

9003 PP Single Male Union Ball Valve M



Size	PCS/CTN
20*1/2"	200
25*3/4"	120
32*1"	80
40*11/4"	60
50*11/2	36
63*2	19

9004 PP Double Union Brass Ball Valve



Size	PCS/CTN
20	200
25	128
32	80
40	60
50	32
63	16

9005 Ball Valve F/F



Size	PCS/CTN
20*1/2"	280
25*3/4"	180
32*1"	120
11/4"*11/4"	84
50*11/2	45
63*2	28

9006 Ball Valve M/F



Size	PCS/CTN
20*1/2"	280
25*3/4"	180
32*1"	112
11/4"*11/4"	84
50*11/2"	45
63*2	28
2-1/2"	16
3"	6
4"	4

9007 Ball Valve M/M



Size	PCS/CTN
20*1/2"	260
25*3/4"	160
32*1"	112
11/4"*11/4"	84
50*11/2	40
63*2	28

► Centrifugal Filter

Centrifugal filter separates particles of different densities by gravity & centrifugal force principles. The filter has outstanding performance for large particles filtration. It's made of PP material to resistant corrosion, acid, rust and alkaline, which greatly extends its lifetime. Easily dismantled sand collector at the bottom is convenient for maintenance and cleaning. As a filter for large particles, it can achieve excellent filter ring performance working with disc filter or screen filter. The centrifugal filter is applied in agricultural irrigation, municipal garden irrigation and industrial water cycle filtration.



▶ Media Filter

size	no. of tank	min flow (m3/h)	max flow (m3/h)	filtration measurement (m2)	backwash (m3/h)	media (kg)	max. pressure (Mpa)	inlet pipe size	drainage pipe size	weight (kg)
SP16-2	2	12	20	0.26	10	220	1	3"	2"	140
SP24-2	2	30	50	0.58	20	500	1	3"	3"	216
SP30-2	2	30	70	0.91	35	640	1	4"	3"	318
SP36-2	2	60	100	1.31	45	920	0.8	4"	3"	400
SP40-2	2	90	130	1.62	65	1120	0.7	6"	4"	512
SP48-2	2	100	180	2.32	80	1600	0.6	6"	4"	650
SP48-3	3	150	270	3.48	80	2400	0.6	6"	4"	975
SP48-4	4	200	360	4.65	80	3200	0.6	8"	4"	1300
SP48-5	5	250	450	5.81	80	4000	0.6	8"	4"	1760
SP48-6	6	300	540	6.97	80	4800	0.6	8"	4"	1950
SP60-2	2	160	220	3.64	130	2500	0.6	6"	4"	972



▶ Filter

Housings made of very strong plastic, designed to resist great pressure which can be used for long time.

Two size of filter element can be chose, one is stainless screen and the other size is disc which can meet different requirement.

Can filter many kinds of water quality and apply for the water treatment both in Agriculture and Industry.

Many sizes available can be met widely demands.

Easy to installation and operation.

Picture	Item No	Size	Thread	Filter Elements	Filter Area (Cm2)	Wp (Bar)	Max Flow (M3/h)
	1725S120M	3/4"	MALE	SCREEN	90	10	5
	1732S120M	1"	MALE	SCREEN	90	10	5
	1725S120FM	3/4"	MALE/FEMALE	SCREEN	90	10	5
	1725D120M	3/4"	MALE	DISC	90	10	5
	1732D120M	1"	MALE	DISC	90	10	5
	1725D120FM	3/4"	MALE/FEMALE	DISC	90	10	10

Picture	Item No	Size	Thread	Filter Elements	Filter Area (Cm2)	Wp (Bar)	Max Flow (M3/h)
	1740S120	1-1/4"	MALE	SCREEN	246	8	15
	1750S120	1-1/2"	MALE	SCREEN	254	8	15
	1750ST120	1-1/2"	MALE	SCREEN	246	8	15
	1740ST120	1-1/4"	MALE	SCREEN	246	8	15
	1750DT120	1-1/2"	MALE	DISC	254	8	15
	1740DT120	1-1/4"	MALE	DISC	254	8	15
	1825S120	3/4"	MALE/FEMALE	SCREEN	17	8	1.8
	FSY02120	2"	MALE	SCREEN	535	8	18
	FSY02175	2-1/2"	MALE	SCREEN	1000	8	25
	FDY02120	2"	MALE	DISC	490	8	18
	FDY02175	2-1/2"	MALE	DISC	998	8	25
	FST02120M	2"	MALE	SCREEN	820	10	30
	FST02120VMV	2"	MALE	SCREEN	820	10	30

Picture	Item No	Size	Thread	Filter Elements	Filter Area (Cm2)	Wp (Bar)	Max Flow (M3/h)
	FST02120VVM	2"	MALE	SCREEN	820	10	30
	FSTL02120M	2"	MALE	SCREEN	1090	10	50
	FSTL02120VMV	2"	MALE	SCREEN	1090	10	50
	FSTL02120VVM	2"	MALE	SCREEN	1090	10	50
	FDT02120M	2"	MALE	DISC	1200	10	30
	FDT02120VMV	2"	MALE	DISC	1200	10	30
	FDT02120VVM	2"	MALE	DISC	1200	10	30
	FDTL02120M	2"	MALE	DISC	1700	10	50
	FDTL02120VMV	2"	MALE	DISC	1700	10	50
	FDTL02120VVM	2"	MALE	DISC	1700	10	50
	FST03120M	3"	MALE	SCREEN	1090	10	50
	FST03120VMV	3"	MALE	SCREEN	1090	10	50
	FST03120VVM	3"	MALE	SCREEN	1090	10	50

Picture	Item No	Size	Thread	Filter Elements	Filter Area (Cm2)	Wp (Bar)	Max Flow (M3/h)
	FDT03120M	3"	MALE	DISC	1700	10	50
	FDT03120VMV	3"	MALE	DISC	1700	10	50
	FDT03120VVM	3"	MALE	DISC	1700	10	50
	FS04120M	4"	MALE	SCREEN	1630	10	60
	FS04120VV	4"		SCREEN	1630	10	60
	FSL04120M	4"	MALE	SCREEN	2180	10	100
	FSL04120V	4"		SCREEN	2180	10	100
	FD04120M	4"	MALE	DISC	2400	10	60
	FD04120V	4"		DISC	2400	10	60
	FDL04120M	4"	MALE	DISC	3400	10	100
	FDL04120V	4"		DISC	3400	10	100
	FS03120M	3"	MALE	SCREEN	1630	10	60
	FS03120V	3"		SCREEN	1630	10	60
	FSL03120M	3"	MALE	SCREEN	2180	10	100
	FSL03120V	3"		SCREEN	2180	10	100

Picture	Item No	Size	Thread	Filter Elements	Filter Area (Cm2)	Wp (Bar)	Max Flow (M3/h)
	FD03120M	3"	MALE	DISC	2400	10	60
	FD03120V	3"		DISC	2400	10	60
	FDL03120M	3"	MALE	DISC	3400	10	100
	FDL03120V	3"		DISC	3400	10	100
	FDTA02120M	2"	MALE	DISC	1650	50	50
	FDTA02120VMV	2"	MALE	DISC	1650	50	50
	FDTA02120VVM	2"	MALE	DISC	1650	50	50
	FDTA03120M	3"	MALE	DISC	1650	50	50
	FDTA03120VMV	3"	MALE	DISC	1650	50	50
	FDTA03120VVM	3"	MALE	DISC	1650	50	50
	FSLA04120M	4"	MALE	DISC	1650	100	100
	FSLA04120V	4"		DISC	1650	100	100
	FDA03120M	3"	MALE				
	FDA03120V	3"					

► Automatic Filtration System

Automatic filtration system advantages

- **Centrifugal Filtration:**
Helix created Centrifugal Action optimizes the filtration performance and reduces backwash frequency and maintenance.
- **Disc Filtration with Maximum Safety:**
All the components are made of high quality vergin materials,
The unique design guarantee an extended life with high resistance
- **Modular Construction:**
The versatility and compatibility of filter permits the system a wide range of flows and configurations, easy to install & change
- **Low Maintenance:**
No tools demand for filter maintenance, easy and fast
- **Exclusive Piston System:**
A piston system to compact the filter elements
Allows for easy decompression of the disc stack during backwash
Easy for handling and disc maintenance.
- **Water and energy saving:**
High efficiency filtration system & backwashing system save the water and energy



Specification	Unit	Main Part Size	Max.pressure	Flow
SZ202-3	2 x 2"	3"	10bar	50 m3/h
SZ203-4	3 x 2"	4"	10bar	64 m3/h
SZ302-4	2 x 3"	4"	10bar	75 m3/h
SZ303-4	3 x 3"	4"	10bar	96 m3/h
SZ304-6	4 x 3"	6"	10bar	128 m3/h
SZ305-6	5 x 3"	6"	10bar	160 m3/h
SZ306-8	6 x 3"	8"	10bar	192 m3/h
SZ403-6	3 x 4"	6"	10bar	192 m3/h
SZ404-6	4 x 4"	6"	10bar	256 m3/h
SZ405-6	5 x 4"	6"	10bar	320 m3/h
SZ406-8	6 x 4"	8"	10bar	384 m3/h
SZ407-8	7 x 4"	8"	10bar	448 m3/h
SZ408-8	8 x 4"	8"	10bar	512 m3/h
SZ409-10	9 x 4"	10"	10bar	576 m3/h
SZ410-10	10 x 4"	10"	10bar	640 m3/h

► Fitting For Micro-irrigation

产品名称 Product Description	货号 Item No.	规格 Size	图片 Picture
Offtake for PE Pipe 管用旁通接头"	OP0112	DN 12	
	OP0116	DN 16	
	OP0120	DN 20	
Offtake for PVC Pipe 管用旁通接头 (带16双层胶圈)	OP0112R	DN 12	
	OP0116R	DN 16	
	OP0120R	DN 20	
New Type Offtake for PVC Pipe 新款管用旁通接头 (带16双层胶圈)	OP0216R	DN 16	
	OP0316R	DN 16	
Straight Connector 管用倒刺直通	SC0112	DN 12	
	SC0116	DN 16	
	SC0120	DN 20	
	SC0125	DN 25	
Reducing Connector 管用变径接头	RC011612	DN 16*12	
	RC012016	DN 20*16	
	RC012520	DN 25*20	
Male Threaded Connector 外螺纹管用接头	MC011612	DN 16*1/2"	
	MC011634	DN 16*3/4"	
	MC011712	DN 1/2*1/2"	
	MC0111734	DN 1/2*3/4"	
	MC012012	DN 20*1/2"	
	MC01234	DN 20*3/4"	
Female Threaded Connector 内螺纹管用接头	FC011612	DN 16*1/2"	
	FC011634	DN 16*3/4"	
	FC02020	DN 20*1/2"	
	FC012034	DN 20*3/4"	
Barb Connector for Lay Flat Hose 软带旁通接头	BL0116	DN 16	
	BL0120	DN 20	

Elbow Connector 管用倒刺弯头	EC0112	DN 12	
	EC0116	DN 16	
	EC0120	DN 20	
	EC0125	DN 25	
Tee Connector 管用倒刺正三通	TC0112	DN 12	
	TC0116	DN 16	
	TC011612	DN 16*12	
	TC0120	DN 20	
	TC012016	DN 20*16	
Male Tee Connector 管用倒刺正三通	TC0125	DN 25	
	TC021612	DN 16*1/2"	
	TC022012	DN 20*1/2"	
	TC022034	DN 20*3/4"	
	TC022512	DN 25*1/2"	
Y type Tee Connector 管用倒刺Y型三通	TC022534	DN 25*3/4"	
	TC0216	DN 16	
End Line 折叠式管用堵头	EL0112	DN 12	
	EL0116	DN 16	
	EL0120	DN 20	
Barb End Line 承插式管用堵头	EL0125	DN 25	
	EL0216	DN 16	
	EL0220	DN 20	
Female Nipple 双边内螺纹接头	EL0225	DN 25	
	SC021212	1/2*1/2"	
	SC013434	3/4"*3/4"	
Nipple 双边外螺纹接头	SC013412	3/4"*1/2"	
	NP0112	/2"	
	NP0134	3/4"	
	NP0110	1"	
	NP0114	1-1/4"	
	NP0132	1-1/2"	
	NP0150	2"	
	NP0163	2-1/2"	
	NP0175	3"	
	NP01100	4"	

Holddown Support 地插式固定支架	HS0116	DN 16	
	HS0120	DN 20	
Safety Ring 夹紧圈	SR0116	DN 16	
	SR0117	1/2"	
	SR0120	DN 20	
	SR0125	DN 25	
Hanging Clamp for PE pipe 悬挂固定管夹	HC0112	DN 12	
	HC0116	DN 16	
	HC0120	DN 20	
	HC0125	DN 25	
Support Stake,8cm Length 地插式支架	SS0407	DN 7	
Multiple Support,15cm Length 多用途地插式支架"	MS0137	3*7	
Starter Connector for Layflat 软带旁通接头	SC013812	3/8"*1/2"	

▶
Mini Valve for Tubing

产品名称 Product Description	货号 Item No.	规格 Size	图片 Picture
Maxi Valve 承插直通阀门	MV0116	DN 16	
	MV0120	DN 20	
	MV0125	DN 25	
Threaded Male-Female Valve 内外螺纹阀门	MF011212	DN 1/2*1/2"	
	MF011234	DN 1/2*3/4"	
	MF013412	DN 3/4*1/2"	
	MF013434	DN 3/4*3/4"	

Threaded Male-Male Valve 外螺纹阀门	MM0112	DN 1/2*1/2"	
	MM0134	DN 3/4*3/4"	
	MM011234T	DN 1/2*3/4"	
Thread-barb Valve 外螺纹承插阀门	V011216	DN 1/2"*16	
	TV011220	DN 1/2"*20	
	TV013416	DN 3/4*16	
	TV013420B	DN 3/4*20	
Barb-Female Thread Valve 内螺纹承插阀门	BF011612	DN 16*1/2"	
	BF011634	DN 16*3/4"	
	BF012012	DN 20*1/2"	
	BF012034	DN 20*3/4"	
Barb Offtake Valve With Rubbe Ring 承插旁通阀门 (带单层橡胶圈)	OV0416R	DN 16	
Barb Offtake Valve for Layflat Hose 软带旁通阀门	OV0716	DN 16	
	OV0720	DN 20	
Barb Lock Offtake Valve 承插锁扣旁通阀门"	OV0516	DN 16	

► Lock Nut Fitting for Driptide

产品名称 Product Description	货号 Item No.	规格 Size	图片 Picture
Lock Coupling for Tape 滴管带用锁扣直接	LC0117	DN 17	
Tape Offtake 滴灌带用旁通接头	TO11706	DN 17*6	
	TO011712	DN 17*12	
Tape Offtake 滴灌带用旁通接头(带橡胶圈)	PO0117	DN 17	
Female Thread Coupling for Tape 内螺纹滴管带用接头	FT011712	DN 17*1/2"	
	FT011734	DN 17*3/4"	
Male Thread Coupling for Tape 外螺纹滴管带用接头	MT011712	DN 17*1/2"	
	MT011734	DN 17*3/4"	
Lock Type Offtake 滴管带用锁扣旁通	LO0117	DN 17	
Barbed Coupling for tape 滴灌带用承插接头	BC011617	DN 17*16	
Connection for Lay Flat Tube 滴灌带用软管旁通接头	CT0117	DN 17	
Connection for Lay Flat Tube 可拆式滴灌带用软管旁通接头	CT0217	DN 17	
Connection for Lay Flat Tube 一体式滴灌带用软管旁通接头	CT0317	DN 17	
Male Thread Tape Elbow 一边外螺纹滴灌带用锁扣弯头	ME011712	DN 17*1/2"	
	ME011734	DN 17*3/4"	

Lock Elbow for Tape 两边锁扣滴灌带用弯头	ET0117	DN 17	
Brab Elbow for Tape 一边承插滴管带用弯头	BE0117	DN 17*16	
Lock Tee for Tape 三边锁扣滴灌带用三通	TT0117	DN 17	
Male Threaded Tape Tee 外螺纹滴灌带用三通	TT021712	DN 17*1/2"	
	TT0217134	DN 17*3/4"	
Female Threaded Tape Tee 内螺纹滴灌带用三通	TT031712	DN 17*1/2"	
	TT031734	DN 17*3/4"	
Tape tee for Layflat Hose 可拆式软带旁通三通	TT0417	Dn17	
Two Barb Tape Tee 两边承插滴灌带用三通	BT021716	16*17*16	
	BT021720	16*17*20	
	BT021725	16*17*25	
One Barb Tape Tee 一边承插滴灌带用三通	BT011716	17*16*17	
	BT011720	17*20*17	
Tape Plug 锁扣式滴灌带用堵头	TP0117	Dn17	
Tape Sleeve End 折叠式滴灌带用堵头	TP0217	Dn17	

► Fertilizer Injector

产品名称 Product Description	货号 Item No.	规格 Size	图片 Picture
Venturi Injector 文丘里式注肥器	VI0112H	1/2"BSP	
	VI0134H	3/4"BSP	
	VI0110H	1"BSP	
	VI01032H	1-1/2"BSP	
Venturi Injector 文丘里式注肥器	VI01063H	2"BSP	
Bypass Assembly 两边承插注肥器旁路总成	BA0112	1/2"	
	BA0134	3/4"	
	BA0110	1"	
	BA0112B	1-1/2"	
Bypass Assembly 两边内螺纹注肥器旁路总成	BA0132	1/2"BSP	
	BA0110B	3/4"BSP	
	BA0134B	1"BSP	
	BA0132B	1-1/2"BSP	
Suction Assembly 带过滤吸管套件	SA0112	1/2"	
	SA0134	3/4"	
	SA0110	1"	
	SA0132	1-1/2"	

► Air & Vacuum Valve

产品名称 Product Description	货号 Item No.	规格 Size	图片 picture
Air&Vacuum Relief Valve 真空排气阀	AV0112	1/2"BSP	
Air&Vacuum Relief Valve 真空排气阀	AV0134	3/4"BSP	
	AV0110	1"BSP	
Air&Vacuum Relief Valve 真空排气阀	EV0134	3/4"BSP	
	EV0110	1"BSP	
Dual Acting Continuous Airr&Vacuum Relief Valve 双向连续型真空排气阀	EV0150	2"BSP	

► Arrow Dropper and Accessory

产品名称 Product Description	货号 Item No.	规格 Size	图片 Picture
Straight Arrow Dropper 直滴箭	2101	1.8L/H	
Bend Arrow Dropper 弯滴箭	2102	2.2L/H	
One Branch Straight Arrow Dropper 一出直滴箭"	2111	50cm*1	
One Branch Bend Arrow Dropper 一出弯滴箭	2112	50cm*1	
Two Branches Straight Arrow Dropper 二出直滴箭	2121	50cm*1	

Two Branches Bend Arrow Dripper 二出弯滴箭	2122	50cm*1	
Four Branches Straight Arrow Dripper 四出直滴箭	2141	50cm*4	
Four Branches Bend Arrow Dripper 四出弯滴箭	2142	50cm*4	
Adaptor for Micro Tube 单倒刺接头	5131	DN 5	
Two Branches for Micro Tube 双倒刺直通	5132	DN 5	
Three Branches for Micro Tube 双倒刺三通	5133	DN 5*2	
Five Branches for Micro Tube 四倒刺五通	5135	DN 5*4	
Six Branches for Micro Tube 四倒刺六通	5136	DN 5*4	

► Dripper

产品名称 Product Description	货号 Item No.	规格 Size	图片 Picture
Take Apart Dripper 开拆洗式滴头	TAD0104	4L/H	
	TAD0108	8L/H	
	TAD0116	16L/H	
Adjustable On-line 可调管上式滴头	AOD0170	"1/4""0-70L/H"	
Take Apart PC Dripper 可拆式压力补偿滴头	PCT0102	2L/H	
	PCT0104	4L/H	
	PCT0108	8L/H	
Corona PC Dripper with No-drain 防滴式压力补偿滴头	PBD2204	4L/H	

► Microsprinkler

产品名称 Product Description	货号 Item No.	规格 Size	图片 Picture
Microsprinkler,Standing Type 倒挂式旋转微喷头	MS1101A-MS1107A	DN 7	
Microsprinkler,Hanged Down Type 站立式旋转微喷头	MS1101B-MS1107B	DN 7	
Microsprinkler,Hanged Down Type 地插式站立式旋转微喷头	MS1101C-MS1107C	DN 7	
Microsprinkler,Standing Type 地插式倒挂式旋转微喷头	MS1101D-MS1107D	DN 7	
Microjet 折射式雾化喷头	MJ1201-MJ1207	DN 7	
Microjet 地插折射式雾化喷头	MJ1231-MJ1237	DN 7	
G Microsprinkler,micro wheel G型小旋轮微喷头	1702-1707	DN 7	
G Microsprinkler,Triangle wheel G型三角轮微喷头	1712-1717	DN 7	
G Microsprinkler,Triangle wheel G型鸭嘴轮微喷头	1722-1727	DN 7	
G Microsprinkler 180 angle, rotating wheel G型1800微喷头	1732-1737	DN 7*1800	
G Microsprinkler 360 angle, rotating wheel G型3600折射微喷头	1742-1747	DN 7*3600	

► Fogger & Mister

Fogger&Mister 雾化喷头			
产品名称 Product Description	货号 Item No.	规格 Size	图片 Picture
Four Outlet Fogger 四出口雾化喷头	MJ1301	DN 7	
	MJ1302	DN 7	
One Outlet Fogger 一出口雾化喷头	MJ1311	DN 7	
	MJ1312	DN 7	
Microjet, Full Circle 全圆折射喷头	MJ1602	360°,DN 7	
	MJ1603	360°,DN 7	
Microjet, 180 Degree Circle 简易雾化喷头	MJ1402	180°,DN 7	
Microjet, 270 Degree Circle 螺口式全圆折射喷头	MJ1414	270°,M5	
	MJ1425	270°,M6	
Elbow Mister 弯喷头	MT0208	DN 7	

► Accessory For Microspray

产品名称 Product Description	货号 Item No.	规格 Size	图片 Picture
Mini Anti-drainage Valve 双边承插式防滴器	4100	DN 7 Socket	
Mini Anti-drainage Valve 单边承插式防滴器	4101	DN 7 Barb*Socket	
Double Socket Adaptor 双边承插式直接	5140	DN 7	
One Barbed Adaptor 一边承插式 一边倒刺直接	5141	DN 7	
Double Barbed Adaptor 双边倒刺式直接	5142	DN 7	
Double Barbed End Line 双边倒刺式堵头	5143	DN 7	
One Barbed End Line 单边倒刺式堵头	5144	DN 7	
One Inside Barbed Adaptor 内承插式单边倒刺直接	5145	DN 7	
Male Threaded Adaptor 内承插式外螺纹接头	5146	DN 7	
Double Inside Barbed Adaptor 双边内承插式直接	5147	DN 7	
Support Adaptor 地插接头	5148A	DN 7*DN 6	
	5148B	DN 7*DN 8	
Weight Hammer 配重锤	5321	6cm Length 6cm长	
Repairing End Line 管上式堵头	5205	DN 6	
Reducing Female Adapt 内螺纹承插接头	5206A	Outside*1/2" DN 7 外锥	
	5206B	Inside*1/2" DN 7 内锥	

Reducing Connector with Male Threaded 外螺纹承插接头	5194A	Outside*1/2" DN 7 外锥	
	5194B	Inside*1/2" DN 7 内锥	
Cilp stake 卡扣地插	CS0133	33cm Length 33cm 长	
	CS0143	43cm Length 43cm 长	
Straight stake 直立式地插	HMS01	50cm Length 50cm 长	
Microsprinkler Hanged Support Set with Anti-drainage Valve 防滴倒挂三件套	HMS02	50cm Length 50cm 长	
Microsprinkler Support Stand Set 地插三件套	SMS0150	50cm Height 50cm Pipe 50cm 高 50cm 长	
Microsprinkler Support Stand Set 地插微喷套件	SMS0230	30cm Height 50cm Pipe 30cm 高 50cm 长	
	SMS0240	40cm Height 50cm Pipe 40cm 高 50cm 长	
Straight Coupling 倒刺直通	SC0314	1/4"	
Barb Elbow 倒刺弯头	EC0314	1/4"	
Barb Tee 倒刺三通	TC0314	1/4"	
Barb Cross 倒刺四通	CC0314	1/4"	

► Sprinkler

MS-160A				
				
MS-160A	MS-160B	MS-160C	MS-160D	MS-160E

Product Parameters 产品参数		Packaging 包装	
Interface size 接口尺寸	G3/4"Full circle,plastic impulse sprinkler G3/4"全圆摇臂喷头	Size 纸箱大小	45×35×28cm
Pressure 压力	2.0-4.0 bar	PC/CTNS 装箱数	100pcs
Range 喷射半径	10-15m	G.W./N.W. 毛净重	14/13kgs
Flux 流量	1400-2150L	Material 材质	POM

MS-5020	
	
MS-5020	MS-5020A

Product Parameters 产品参数		Packaging 包装	
Interface size 接口尺寸	G3/4"Full circle,plastic impulse sprinkler G3/4"全圆摇臂喷头	Size 纸箱大小	45×35×28cm
Pressure 压力	1.0-3.0 bar	PC/CTNS 装箱数	250pcs
Range 喷射半径	6-10m	G.W./N.W. 毛净重	17.5/16.5kgs
Flux 流量	700-1100L	Material 材质	POM




Product Parameters 产品参数		Packaging 包装	
Interface size 接口尺寸	G3/4"Full circle,plastic impulse sprinkler G3/4"全圆摇臂喷头	Size 纸箱大小	54×38×33.5cm
Pressure 压力	2.5-5.0 bar	PC/CTNS 装箱数	100pcs
Range 喷射半径	12-18m	G.W./N.W. 毛净重	23/22kgs
Flux 流量	1650-2150L	Material 材质	POM



Product Parameters 产品参数		Packaging 包装	
Interface size 接口尺寸	G3/4"Full circle,plastic impulse sprinkler G3/4"全圆摇臂喷头	Size 纸箱大小	45×35×32cm
Pressure 压力	2.5-5.0 bar	PC/CTNS 装箱数	100pcs
Range 喷射半径	12-18m	G.W./N.W. 毛净重	23/22kgs
Flux 流量	1650-2150L	Material 材质	POM




Product Parameters 产品参数		Packaging 包装	
Interface size 接口尺寸	G1/2", G3/4"Full or part circle,plastic impulse sprinkler G1/2", G3/4"可调节摇臂喷	Size 纸箱大小	61×41×45cm
Pressure 压力	1.5-3.5 bar	PC/CTNS 装箱数	300pcs
Range 喷射半径	8-12m	G.W./N.W. 毛净重	23/22kgs
Flux 流量	800-1250L	Material 材质	POM

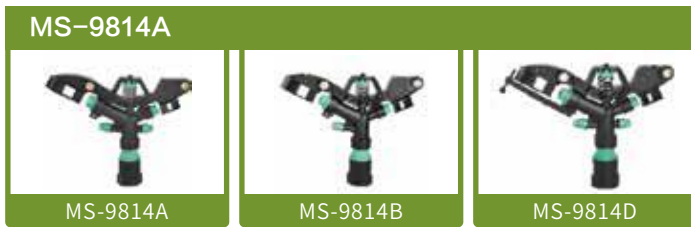

Product Parameters 产品参数		Packaging 包装	
Interface size 接口尺寸	G1"Full circle,plastic impulse sprinkler G1"全圆摇臂喷头	Size 纸箱大小	45×35×45cm
Pressure 压力	3.0-5.0 bar	PC/CTNS 装箱数	50pcs
Range 喷射半径	13-19m	G.W./N.W. 毛净重	14/13kgs
Flux 流量	2100-2800L	Material 材质	PP+POM



Product Parameters 产品参数		Packaging 包装	
Interface size 接口尺寸	G1"Full or part circle,plastic impulse sprinkler G1"可调节摇臂喷头	Size 纸箱大小	54×38×33.5cm
Pressure 压力	3.0-5.0 bar	PC/CTNS 装箱数	50pcs
Range 喷射半径	13-20m	G.W./N.W. 毛净重	18/17kgs
Flux 流量	2100-2800L	Material 材质	PP+POM

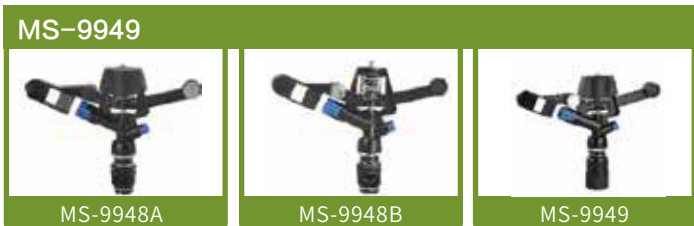

Product Parameters 产品参数		Packaging 包装	
Interface size 接口尺寸	G3/4"Full circle,plastic impulse sprinkler G3/4"全圆摇臂喷头	Size 纸箱大小	45×35×28cm
Pressure 压力	1.5-3.5 bar	PC/CTNS 装箱数	100pcs
Range 喷射半径	13-16m	G.W./N.W. 毛净重	14/13kgs
Flux 流量	1400-1900L	Material 材质	POM

► Sprinkler Hose Fitting

产品名称 Product Description	货号 Item No.	规格 Size	图片 Picture
Lock Adaptor with Male Thread 外螺纹旁通	GSM012532	DN 25*1"	
	GSM013232	DN 32*1"	
	GSM013250	DN 32*1-1/2"	
	GSM014040	DN 40*1-1/4"	
	GSM014050	DN 40*1-1/2"	
	GSM014540	DN 45*1-1/4"	
	GSM014550	DN 45*1-1/2"	
	GSM014563	DN 45*2"	
	GSM015040	DN 50*1-1/4"	
	GSM015050	DN 50*1-1/2"	
	GSM015063	DN 50*2"	
	GSC0125	DN 25	
	GSC0132	DN 32	
	GSC0140	DN 40	
	GSC0145	DN 45	
Straight Lock Coupling 拉扣直通	GSC0150	DN 50	
	GSE0125	DN 25	
	GSE0132	DN 32	
	GSE0140	DN 40	
	GSE0145	DN 45	
Straight Lock End Line 拉扣堵头	GSE0150	DN 50	
	GSE0150-70	30-60mm	
	GSE0150-70B	30-60mm	
Fixed End Line 地插式堵头			